

Decommissioning Tooling Container

Multipurpose backup for decom operations


Stay ahead of schedule and tackle unforeseen challenges with Decommissioning Tooling Container (DTC), a purpose-built solution designed to enhance operational efficiency.

With its ergonomic design and organized storage, DTC ensures critical tools, spare parts, and backup resources are always within reach, minimizing downtime and maximizing productivity.

DTC is certified to DNV 2.7-1, ATEX 2014/34/EU, and Machinery Directive 2006/42/EC, ensuring compliance with international safety standards. Designed for explosive environments, it meets Norsok Z-015 and other industry regulations, with an Ex rating of II 3 GD IIA T4 (X).

Features

- Ensures critical decommissioning tools are readily available for seamless operations
- Additional storage for spare parts and backup tools provides contingency for unforeseen events
- Optimizes decommissioning efficiency, keeping projects ahead of schedule

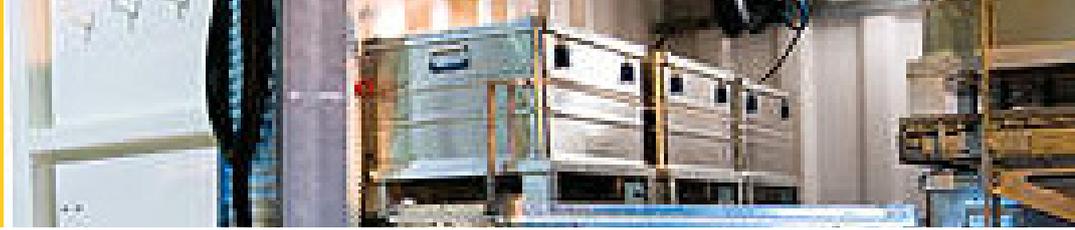

Technical Specifications

DTC is a comprehensive offshore decommissioning solution, equipped with cutting, grinding, and dredging tools designed for increasing efficiency on subsea operations.


Contact mail@deepcgroup.com for more details.

Dimensions

LxWxH:	2991x2478x3015 mm	Power requirements:	1,6m ³ / min @6,2 bar
Net wt. w/ crane & shelves:	4300 kg	Payload:	7700 kg
Maximum gross weight:	12000 kg	Maximum load on shelf:	180 kg
		Safe working load, crane:	180 kg

Items Listed

<u>Diamond Wire Saw:</u>	4-18" cutting range	<u>Dirty Work Pack:</u>	Max Output Flow 60 l/min
<u>Grinder:</u>	7" or 9" disks	<u>10T ROV Chain Hoist:</u>	Max Torque 50 Nm
<u>Rotary Saw:</u>	7" to 14" disks	<u>3T ROV Chain Hoist:</u>	Max Torque 50 Nm
<u>ROV Dredge 8":</u>	60 lpm @ 180 bar	<u>Merlin Zip Pump:</u>	Up to 600 L/min
<u>ROV Grouting Breaker Kit:</u>	30L/min water flow	<u>AnchorZip 10:</u>	Up to 80 m ³ /h
<u>RCO 40 Wire Rope Cutter:</u>	:Max Ø 38 mm	<u>Mesh Wire Cutting Tool:</u>	40 LTR@200 bar
<u>RCO 54 Wire Rope Cutter:</u>	Max Ø 54 mm	<u>55 mm Soft Line Cutter:</u>	210 bar
<u>RCV 115 Wire Rope Cutter:</u>	Max Ø 115 mm	<u>80 mm Soft Line Cutter:</u>	690 bar
<u>Ø55 Hi Flow Hot stab:</u>	60 L/min @ 210 bar	<u>Ø55 Hi Flow Hot stab:</u>	60 L/min @ 210 bar

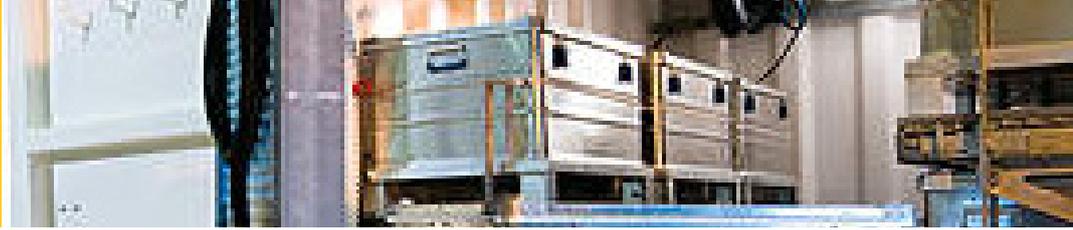

Technical Drawings

DTC is engineered for efficient offshore decommissioning, featuring a layout that optimizes tool accessibility and storage. The technical drawings illustrate its structural design, internal organization, and lifting points.

